

LE SERIES ERVs

COMMERCIAL ENERGY RECOVERY VENTILATORS



LE10XINV shown

- ◆ Packaged static-plate total energy recovery ventilator
- ◆ 1,500-11,000 CFM
- ◆ Single-point connection, TEFC standard premium efficiency motors
- ◆ Modular design
- ◆ Options and accessories: integrated programmable controls, VFDs, double wall, Class 1 low-leakage dampers, MERV 13 filters



 **VENTILATION SOLUTIONS
FOR EVERY APPLICATION**

LE SERIES PACKAGED ENERGY RECOVERY VENTILATORS

DEFICIENT INDOOR AIR QUALITY IS A THREAT

As **buildings get tighter to seal weather out, they seal in contaminants**, causing a reduction in indoor air quality (IAQ). Typical contaminants include off-gassing from carpeting, furniture and building materials, excess humidity and mold, odors, cooking and cleaning fumes, CO2, hair and fibers, to name a few.

Deficient IAQ is a threat since it can harm occupant health and cognitive function, damage structures and hurt the bottom line. It's especially concerning since people spend about 90% of their time indoors, and indoor air can be two to five times—and up to 100 times—more polluted than outdoor air. The EPA ranks indoor air pollution as a top-five health risk.¹

ADVERSE EFFECTS OF DEFICIENT IAQ

HEALTH PROBLEMS

Deficient IAQ can cause allergies, headaches, coughs, asthma, skin irritations and breathing difficulties, as well as cancer, liver disease, kidney damage and nervous-system failure.

COGNITIVE IMPAIRMENT

Harvard and Berkeley Lab found that CO2—a constituent of exhaled breath—negatively impacts thinking and decision-making at levels commonly found indoors.²

DISEASE TRANSMISSION

Ventilation with outdoor air is vital to diluting airborne contaminants and decreasing disease transmission rates.

REDUCED PRODUCTIVITY

Berkeley Lab found that deficient IAQ can cost \$200 billion in debilitated worker performance and \$58 billion in lost sick time.³



VENTILATION CAN ENHANCE IAQ AND DECREASE THE TRANSMISSION OF AIRBORNE INFECTIOUS DISEASES, INCLUDING COVID-19:
[BIT.LY/COVID19WP_22](https://bit.ly/COVID19WP_22)

¹ “Why Indoor Air Quality is Important to Schools,” U.S. Environmental Protection Agency (EPA), <https://bit.ly/2SoyRJc>.

² Romm, “Exclusive: Elevated CO2 Levels Directly Affect Human Cognition, New Harvard Study Shows,” Climate Progress, <https://bit.ly/2Vp6AE2>.


³ Alevantis, Berman, Mills, Perlman, “The Costs and Financial Benefits of Green Buildings,” U.S. Green Building Council (USGBC), <https://bit.ly/2KnP50c>.

HIGHEST-QUALITY INDOOR AIR VIA VENTILATION

The solution to pollution is dilution achieved via **increased and balanced ventilation**, which is the most effective way to realize cleaner and healthier indoor air. With enough controlled fresh and filtered outdoor air coming in to replace equal parts of stale indoor air via balanced design, IAQ will be enhanced.

This can be done energy-efficiently, cost-effectively and sustainably with RenewAire's energy recovery ventilation solutions, which reuse otherwise-wasted total energy from the exhaust airstream to condition incoming outdoor air. The results are improved IAQ, greater ventilation efficiency and major energy cost savings.

AIRSTREAMS DO NOT MIX & POLLUTANTS ARE NOT TRANSFERRED ACROSS PARTITION PLATES

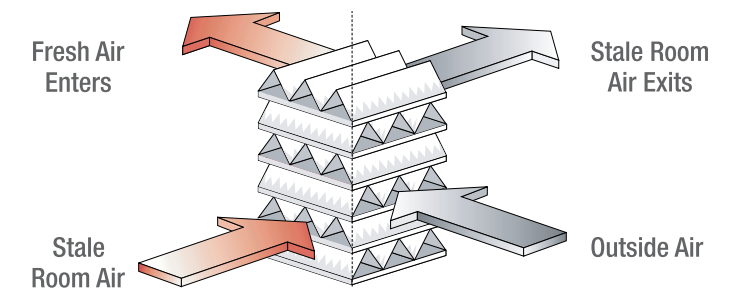

ASHRAE BUILDING CODES & STANDARDS

With the goal of building sustainably and creating healthy environments for all, the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE) has written several standards and guidelines. By enhancing IAQ and saving energy, RenewAire technologies provide the means to meet and exceed all ASHRAE standards and guidelines. Following these parameters leads to greener structures and healthier occupants.

- **ASHRAE Standard 62.1:** “Ventilation for Acceptable Indoor Air Quality” is the recognized standard for designing ventilation systems to achieve acceptable IAQ. ERVs play a key role by creating cleaner and healthier indoor air while optimizing energy efficiency.
- **ASHRAE Standard 90.1:** “Energy Standard for Buildings Except Low-Rise Residential Buildings” is a benchmark for commercial building energy codes in the U.S. and across the world. ERVs are required in several instances based on climate zone and percent of outdoor air at full design airflow rate.



RENEWAIRE VENTILATION SOLUTIONS IMPROVE HEALTH & WELLNESS

RENEWAIRE CORE TECHNOLOGY

CERTIFICATION

- Commercial Units: Certified by the Air Conditioning, Heating and Refrigeration Institute (AHRI) for an industry-leading, low-to-zero Exhaust Air Transfer Ratio (EATR) at typical static pressure differential
- Residential Units: Certified by the Home Ventilating Institute (HVI) against standard CAN/CSA-C439-18 for an industry leading CFM/W and energy transfer effectiveness (except BR 70)
- Superior core flammability performance; passes UL-723 and UL-1812

MAINTENANCE

- RenewAire cores are easy to clean without removing them from the unit, and they never require washing

INNOVATIVE CONSTRUCTION

- Core exchanger material is cellulosic-based and doesn't contain or use halogenated flame retardants or PVCs
- Manufactured with a galvanized steel frame

RELIABILITY

- An industry-leading 10-year structural and performance warranty for the static-plate core, two-year warranty for commercial products

EXCEPTIONAL PERFORMANCE


- Moderates heat and humidity via total energy recovery to maintain a comfortable indoor environment
- No need for condensate pans
- Laminar airflow ensures that particulates do not accumulate in the core

REDUCED COSTS


- Optimized energy efficiency via core energy transfer decreases ventilation energy requirements, which can result in smaller air conditioning and heating needs

RENEWAIRE ERVs TEMPER THE AIR

Our ERVs moderate the extremes of outdoor supply-air temperature and humidity year-round, providing a sustainable ventilation solution for every climate.

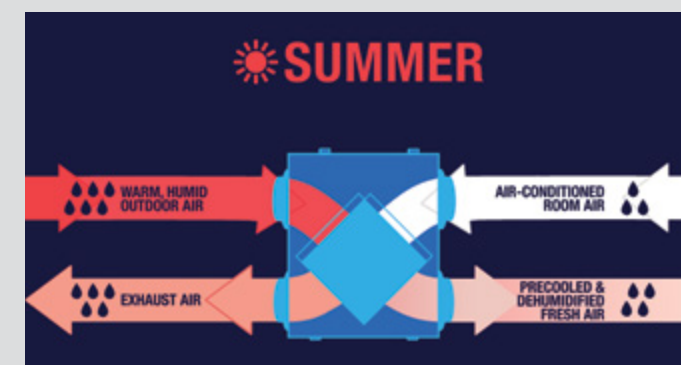

IN SUMMER, THE WARM, HUMID OUTSIDE AIR IS PRECOOLED AND DEHUMIDIFIED BY THE OUTGOING COOL INTERIOR AIR

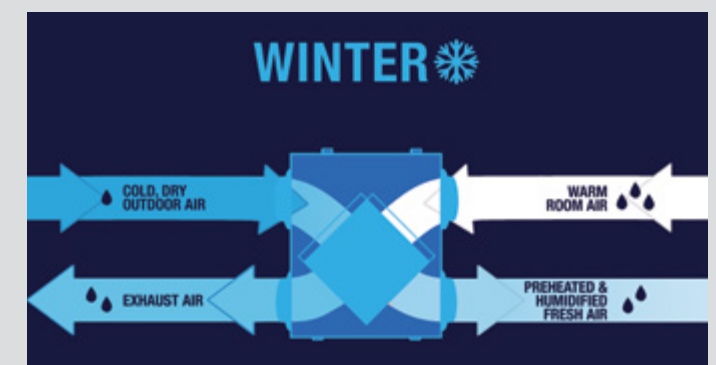


IN WINTER, THE COLD, DRY OUTSIDE AIR IS PREHEATED AND HUMIDIFIED BY THE OUTGOING WARM INTERIOR AIR

A CLOSER LOOK

LE SERIES

As part of our robust commercial ERV line, the innovative LE Series bolsters flexibility, reliability and efficiency for large-capacity applications. With both indoor and outdoor units available, as well as an extensive airflow range of 1,500-11,000 CFM, the LE Series provides the optimal **solution for every commercial job**. Utilizing our LE Series ERVs can **enhance IAQ, downsize HVAC equipment and reduce costs**.

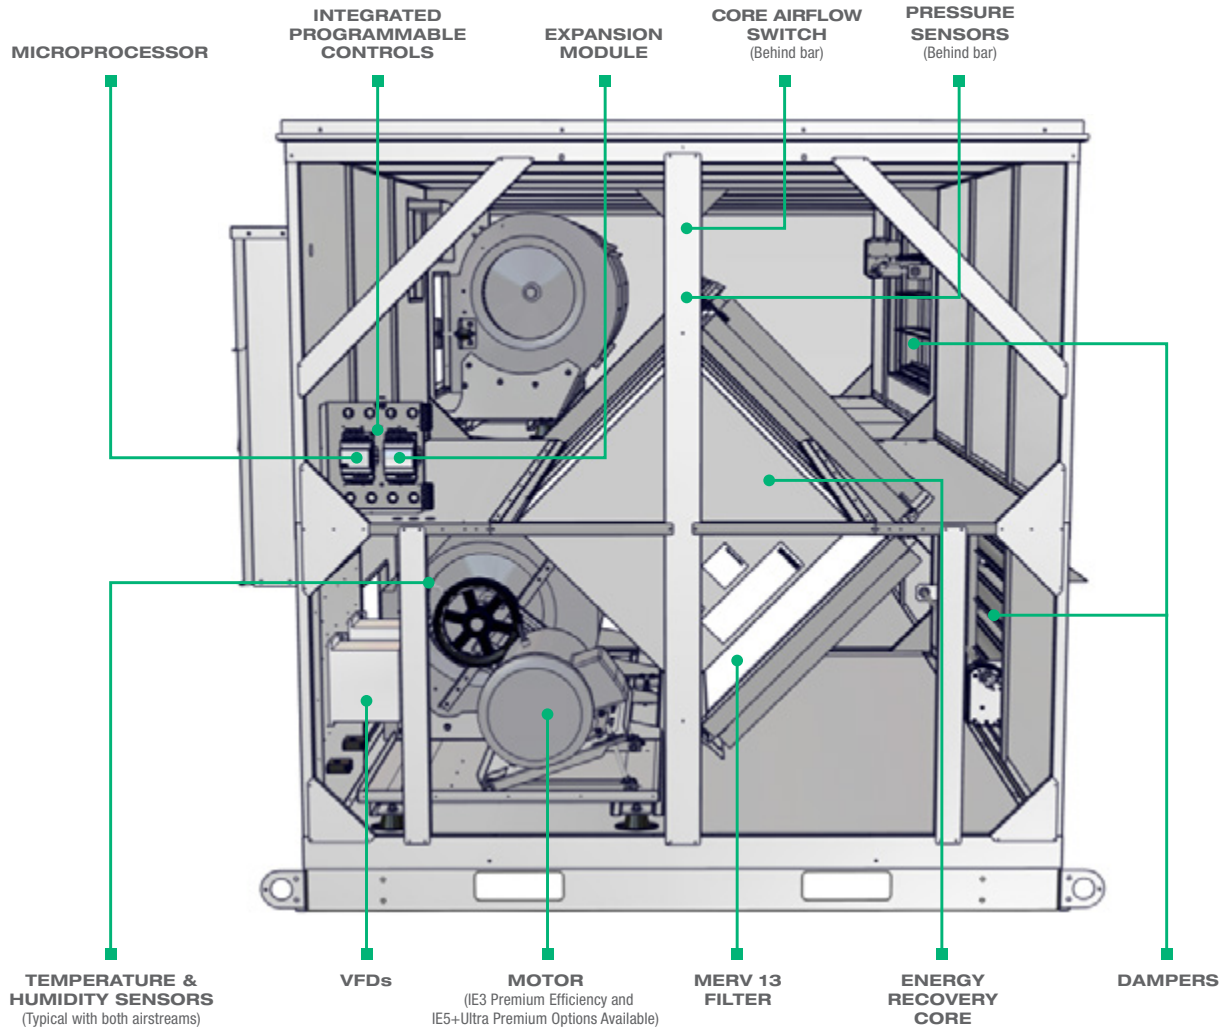

**VIEW LIFE SIZE VERSION
OF AN LE10XRT ERV**



RENEWAIRE VENTILATION SOLUTIONS INCREASE MONETARY BENEFITS

RenewAire in Action

CASE STUDY: HVAC LOAD REDUCTION & HEALTHY IAQ AT GRAND CANYON UNIVERSITY



- ◆ HVAC loads reduced by 40%
- ◆ Annual HVAC costs reduced by 40% every year for the life of the ERVs
- ◆ ERVs excel in small spaces due to downsized HVAC equipment
- ◆ ERVs work within limiting parameters of existing HVAC infrastructure



LEARN MORE ABOUT THIS CASE STUDY: [BIT.LY/2JPAFT5](https://bit.ly/2JPAFT5)

GREEN BUILDING TRENDS

High-performance, green-building standards seek to reduce energy use and increase ventilation to improve health, wellness, IAQ and indoor environmental quality (IEQ). Sustainable design initiatives like ASHRAE Standard 189.1, LEED, 2030 Challenge, Living Building Challenge and WELL Building Standard have grown in popularity among architects, engineers, contractors and building owners alike. RenewAire ventilation technologies create healthier and more comfortable indoor environments, while optimizing energy efficiency. This is done by reusing otherwise-wasted total energy from the exhaust air to condition incoming outdoor air. The results are exceptional IAQ, IEQ, energy reductions and cost savings.



RENEWAIRE ERVs ARE THE SUSTAINABLE VENTILATION SOLUTION



RenewAire supports the

PILLARS OF SUSTAINABILITY

PEOPLE

Reduce acute and chronic health problems

Improve alertness and cognitive function

Boost productivity

PLANET

Committed to green manufacturing since 1982

Protect the environment with less energy use

Achieve a green structure with greater energy efficiency

PROFIT




Can benefit from a short payback period

Realize annual energy savings

Trouble-free operations and maintenance



LE MODELS AT A GLANCE





		LE6X	LE8X	LE10X	
UNIT	Airflow Range	1,500–6,600 CFM	2,000–8,800 CFM	2,500–11,000 CFM	
	Indoor & Outdoor Installation Location	✓	✓	✓	
	Non-Fused (standard) & Fused (optional) Unit Disconnect	✓	✓	✓	
	Energy Recovery Static Plate, Heat & Humidity Transfer	✓	✓	✓	
CABINET	Single & Double Wall (optional) Construction	✓	✓	✓	
	1" Foil-Faced Insulation	✓	✓	✓	
	2,500-Hour Salt Spray Rated in White & Custom (optional) Painted Cabinets	✓	✓	✓	
	Class 1 Low-Leakage Isolation Dampers - OA, RA or Both Airstreams	✓	✓	✓	
SUPPLY/EXHAUST FAN	Forward Curved Centrifugal Supply/Exhaust Blower	✓	✓	✓	
	Belt-Driven Supply/Exhaust Fan Type	✓	✓	✓	
	Supply/Exhaust Fan Speed Controls with Sheave and Motor Starters or VFD	✓	✓	✓	
	Supply/Exhaust Fan Vibration Isolation	Rubber-in-Shear, Spring Isolators (optional)	Rubber-in-Shear, Spring Isolators (optional)	Rubber-in-Shear, Spring Isolators (optional)	
	Supply/Exhaust Fan Motor Voltage at 60 Hz	208-230V 1P	✓	✓	✓
		208-230V 3P	✓	✓	✓
		460V 3P	✓	✓	✓
575V 3P		✓	✓	✓	
Unit ESP	0–2 in. w.g.	0–2 in. w.g.	0–2 in. w.g.		
CONTROLS	Integrated Programmable Controls - Enhanced, Premium (optional)	✓	✓	✓	
	Optional Communications	BACnet, Modbus RTU or TCP	BACnet, Modbus RTU or TCP	BACnet, Modbus RTU or TCP	
ACCESSORIES	Roof Curbs	✓	✓	✓	
	MERV 8 Filters (standard)	✓	✓	✓	
	MERV 13 Filters (optional)	✓	✓	✓	
CERT.	Certifications				





Note: The IE5+ motor is only available for 208-230V and 460V 3P.

AIRFLOW ORIENTATIONS

INDOOR




OUTDOOR




APPLICATION STRATEGIES

AIR SUPPLIED TO INTAKES OF TERMINAL UNITS

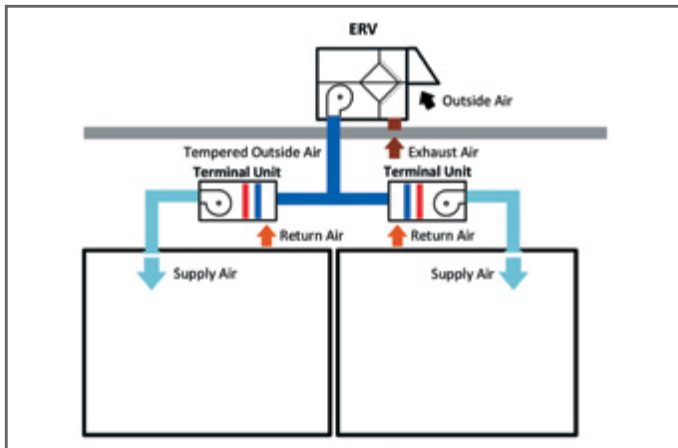


- Variable refrigerant flow/volume
- Active chilled beam
- Fan coils

DIRECT-TO-ZONE WITH TERMINAL UNITS

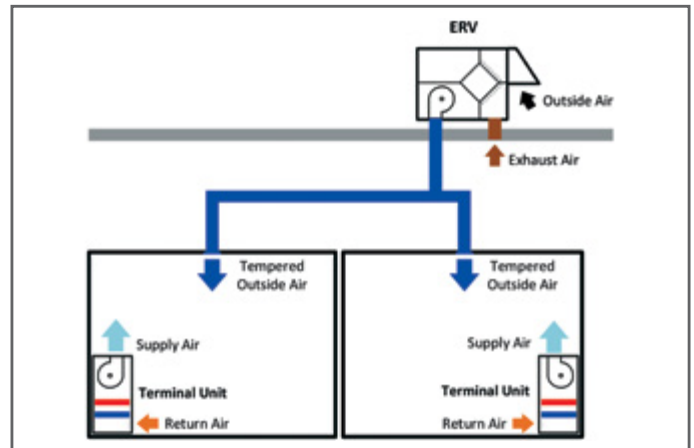


- Variable refrigerant flow/volume
- Chilled beam
- Fan coils
- Radiant floor heating & cooling
- Heat pumps
- Packaged terminal air conditioning

SUPPLY AIR TO MIXING BOXES FOR INDOOR TERMINAL UNITS OR ROOFTOPS

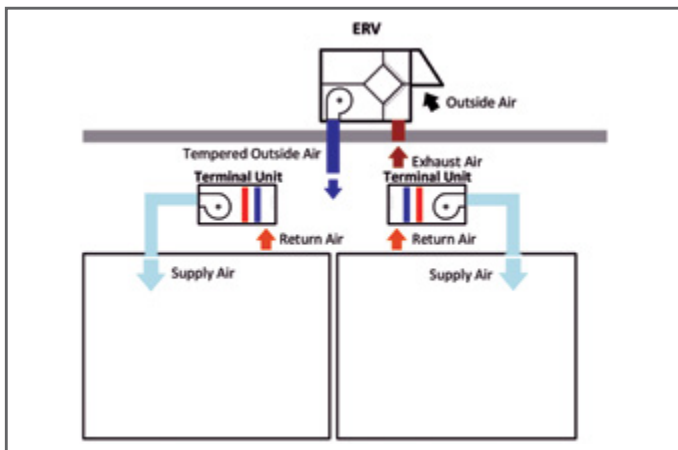

- Variable refrigerant flow/volume
- Chilled beam
- Fan coils

DIRECT-TO-ZONE WITH ROOFTOP OR ALTERNATIVELY TO MIXING BOX OF ROOFTOP UNITS (See dotted line)

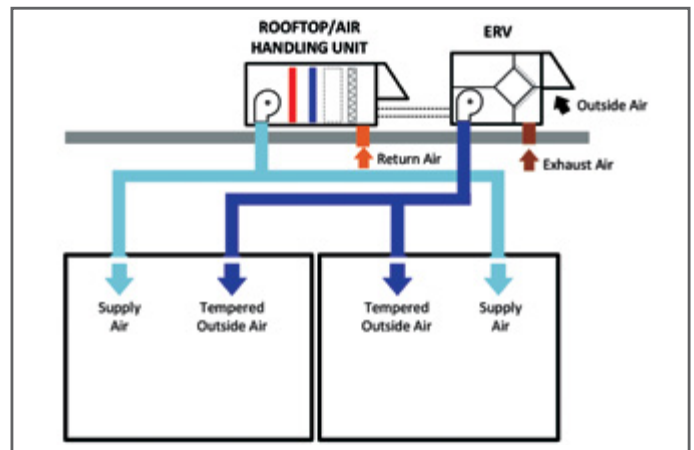

ACCESSORIES

CONTROLS



C02 Sensor Wall Mount



IAQ Sensor Wall Mount



C02 Sensor Duct Mount



IAQ Sensor Duct Mount



Temperature Sensor Duct Mount



BACnet Fan Control



Occupancy Sensor Ceiling Mount



Occupancy Sensor Wall Mount



Duct Static Pressure Sensor Wall/Duct Mount without Display



Duct Static Pressure Sensor Wall/Duct Mount with Display



Smoke Detector Duct Mount



Remote Display Handheld or Wall Mount


CURBS




Digital Time Clock Wall Mount



Digital Time Clock Exterior Enclosure



Standard Roof Curb




Engineered Combo Curb (for select AHU/RTU)

WALL VENTS AND DAMPERS



Louvered Wall Vent, 10" Round Duct Connection, 12" x 12"



Hooded Wall Vent 10" & 12" Galvanized, Paintable Galvanneal



Backdraft Damper 10" & 12"



Automatic Balancing Damper 4", 5" & 6"

HEATERS



RH Series Electric Duct Heater (for indoor units only)



EK Series Electric Duct Heater (for indoor units only)



GH Series Indirect Gas-Fired Duct Furnace (indoor or rooftop)



2" MERV 8, 13

FILTERS