

ERV GUIDE

FOR ENHANCED INDOOR AIR QUALITY & ENERGY EFFICIENCY



BENEFITS OF INCREASED VENTILATION



**BETTER
HEALTH**



**REDUCED
VIRAL SPREAD**



**IMPROVED
COGNITIVE
FUNCTION**



**INCREASED
PRODUCTIVITY**

— **RENEWAIRE EVERYWHERE** —

EVERY GEOGRAPHY, EVERY CLIMATE, EVERY HOME,
EVERY BUILDING AND EVERY APPLICATION

INDOOR AIR QUALITY MATTERS

DEFICIENT INDOOR AIR QUALITY IS A THREAT

As buildings get tighter to seal weather out, they seal in contaminants, causing a reduction in indoor air quality (IAQ). Typical contaminants include off-gassing from carpeting, furniture and building materials, excess humidity and mold, odors, cooking and cleaning fumes, CO2, hair and fibers to name a few.

Deficient IAQ is a threat since it can harm occupant health and cognitive function, damage structures, and hurt the bottom line. It's especially concerning since people spend about 90% of their time indoors, and indoor air can be two to five times more polluted than outdoor air. The EPA ranks indoor air pollution as a top-five health risk.¹

ADVERSE EFFECTS OF DEFICIENT IAQ

HEALTH PROBLEMS

Deficient IAQ can cause allergies, headaches, coughs, asthma, skin irritations and breathing difficulties, as well as cancer, liver disease, kidney damage and nervous-system failure.

COGNITIVE IMPAIRMENT

Harvard and Berkeley Lab found that CO2—a constituent of exhaled breath—negatively impacts thinking and decision-making at levels commonly found indoors.²

DISEASE TRANSMISSION

Ventilation with outdoor air is vital to diluting airborne contaminants and decreasing disease transmission rates.

REDUCED PRODUCTIVITY

Berkeley Lab found that deficient IAQ can cost \$200 billion in debilitated worker performance and \$58 billion in lost sick time.³



VENTILATION CAN ENHANCE IAQ AND DECREASE THE TRANSMISSION OF AIRBORNE INFECTIOUS DISEASES, INCLUDING COVID-19: [BIT.LY/COVID19WP_25](https://bit.ly/COVID19WP_25)

¹ "Why Indoor Air Quality is Important to Schools," U.S. Environmental Protection Agency (EPA), <https://bit.ly/2SoyRJc>.

² Romm, "Exclusive: Elevated CO2 Levels Directly Affect Human Cognition, New Harvard Study Shows," Climate Progress, <https://bit.ly/2Vp6AE2>.

³ William, Fisk "Estimates of Potential Nationwide Productivity and Health Benefits From Better Indoor Environments: An Update," Indoor Environment Berkeley Lab, <https://bit.ly/4ru2F4E>.

PEOPLE SPEND 90% OF THEIR TIME INDOORS

Everyone is at risk of suffering from deficient IAQ. Due to weaker immune systems, children and seniors are the most vulnerable. Children are especially susceptible because proportionally they inhale more pollutants than adults and have narrower airways (World Health Organization).

RENEWAIRE
VENTILATION
SOLUTIONS
IMPROVE
HEALTH AND
WELLNESS



REDUCE INDOOR AIR CONTAMINANTS

1. Contaminated Airborne Aerosols: Aerosols generated by coughing, sneezing, talking, and breathing can act as carriers for viruses and bacteria

2. Humidity: Exhaled breath, water sources (faucets, showers, leaks, floods)

3. Carbon Dioxide: Constituent of exhaled breath

4. Formaldehyde: Off-gassed from adhesives, fabric treatments, stains, varnishes

5. Odors: Bathrooms, kitchens, dry-erase markers, occupant odors (perfume, soap/shampoo residue, clothing detergent, general odors), pets

6. Tobacco smoke: Smoking areas close to building entrance

7. Phthalates: Off-gassed from adhesives, vinyl flooring, wood finishes, plastic plumbing pipes, other building materials

8. VOCs, toxic gases, vapors: Off-gassed from furniture, carpets, paints, cleaners, solvents, glues, building materials

9. Ozone: Off-gassed from copiers, electrostatic air cleaners, other office equipment



REDUCE ENERGY COSTS AND IMPROVE IAQ AT HOME


HIGHEST-QUALITY INDOOR AIR VIA VENTILATION

The solution to pollution is dilution achieved via **increased and balanced ventilation**, which is the most effective way to realize cleaner and healthier indoor air. With enough controlled fresh and filtered outdoor air coming in to replace equal parts of stale indoor air via balanced design, IAQ will be enhanced.

TYPES OF HOME VENTILATION	FAIR	GOOD	BETTER	BEST
	EXHAUST ONLY (bath fans)	BALANCED VENTILATION	HRV	ERV
EXHAUSTS CONTAMINANTS FROM WHOLE HOUSE: Generally, exhaust-only ventilation, such as bath fans and oven hoods, only expel contaminants from a localized single source. The optimal solution will provide whole-house ventilation.	✗	✓	✓	✓
PROVIDES FILTERED SUPPLY AIR: Exhaust-only units bring in uncontrolled outdoor air that has seeped through cracks and openings. Uncontrolled air is not filtered air. Controlled supply air is preferable as contaminants are filtered out.	✗	✓	✓	✓
PERFORMS WELL IN ALL CLIMATES YEAR-ROUND: Hot, humid or sub-zero extreme environments add a heavy load onto home heating and cooling systems. Because RenewAire ERVs temper the air (temperature and humidity) via energy recovery, they work well in all climates. Additionally, RenewAire ERVs do NOT have issues with freezing in winter conditions, which can be problematic for HRVs: <ul style="list-style-type: none"> ◆ Since humidity is transferred via core material in an ERV, the core itself will not freeze so there is no need for defrost (known issue with HRVs) ◆ There are no condensate lines to freeze in an ERV (known issue with HRVs) 	✗	✗	✗	✓
OPTIMIZES ENERGY AND SAVES MONEY: Energy recovery recycles energy by reusing the otherwise-wasted energy and humidity from exhaust air to temper incoming outdoor air, which saves money year after year by lowering demand/load on your mechanical AC/heating equipment.	✗	✗	✗	✓
EASY TO INSTALL: RenewAire ERVs can be mounted in multiple orientations and they do not require drain pans, which makes them a breeze to install. By comparison, HRVs require drain pans, which can complicate installation. Also, ERVs provide a single exhaust point, which means less equipment to purchase and install (no need for individual bath fans).	✗	Maybe ?	✗	✓
EASY TO MAINTAIN: Since RenewAire ERVs do not require drain pans (like HRVs), issues with frozen drain lines in cold-weather applications are avoided. Additionally, since ERVs provide a single exhaust point, this means less maintenance and cleaning. Our ERVs are effortless to maintain—simply check and replace disposable filters as needed and vacuum the ERV core face once a year.	✗	Maybe ?	✓	✓

THE BEST SOLUTION

The best solution is RenewAire's energy recovery ventilation technology, which provides **enhanced IAQ**, greater **ventilation efficiency** and major **energy cost savings**.

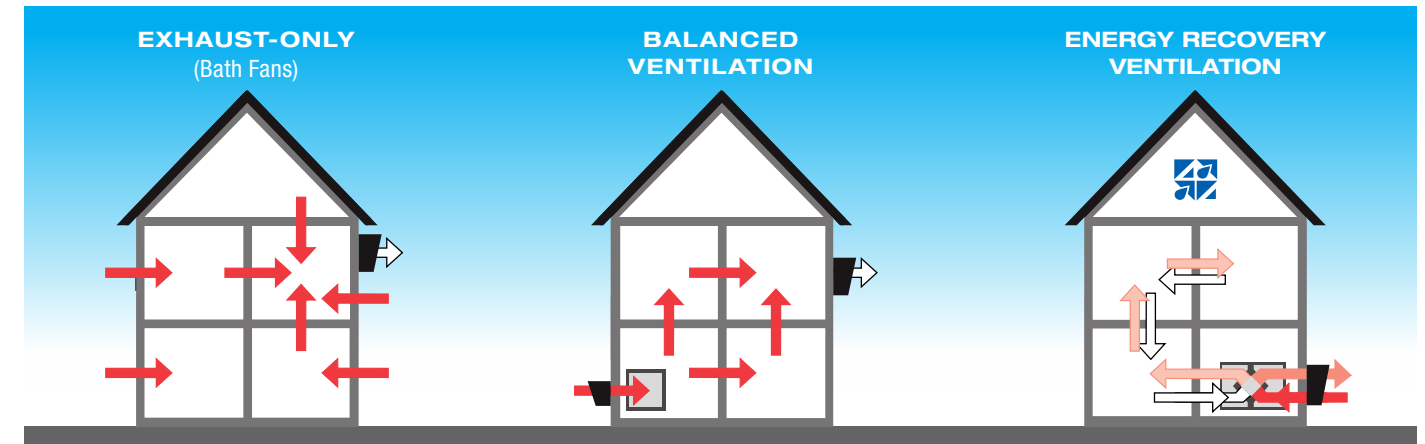

Whole Home Ventilation: No ☹, Single Space Exhaust
Filtered Supply Air: No ☹
Tempered Supply Air: No ☹

Whole Home Ventilation: Yes ☺, push/pull provides optimized ventilation effectiveness to all spaces
Filtered Supply Air: Maybe ☹
Tempered Supply Air: No ☹

Whole Home Ventilation: Yes ☺, push/pull provides optimized ventilation effectiveness to all spaces
Filtered Supply Air: Yes ☺
Tempered Supply Air: Yes ☺

BETTER HEALTH + LOWER BILLS = INCREASED VENTILATION VIA ERVs

The American Society of Heating, Refrigeration and Air Conditioning Engineers (ASHRAE) 62.2 committee has established a residential ventilation standard, known as *Ventilation and Acceptable Indoor Air Quality in Residential Buildings*. The goal of this standard and its continuous revisions are to not only **evaluate and recommend every building's minimum ventilation needs**, but also emphasize indoor air quality and its relationship with occupant health. **ERVs reduce energy costs while meeting the standard.**

See the chart below to calculate the minimum ventilation required for your home: $.03 \times \text{sq. ft.} + 7.5(\text{bedroom} + 1)$. For example, a 2,200 sq. ft. home with four bedrooms requires a minimum of 104 CFM.

SQUARE FEET	MINIMUM VENTILATION AIRFLOW REQUIRED BY HOME SIZE*							
	<500'	501'-1000'	1001'-1500'	1501'-2000'	2001'-2500'	2501'-3000'	3001'-3500'	3501'-4000'
1 BEDROOM	30	45	60	75	90	105	120	135
2 BEDROOMS	38	53	68	83	98	113	128	143
3 BEDROOMS	45	60	75	90	105	120	135	150
4 BEDROOMS	53	68	83	98	113	128	143	158
5 BEDROOMS	60	75	90	105	120	135	150	165

* Infiltration credit not considered, please contact RenewAire to assist in selecting a unit that is best suited for your home.

RENEWAIRE SINGLE/MULTI-FAMILY ERV FRESH AIR SYSTEM



AERI™ SERIES

- ◆ 35–255 CFM
- ◆ Five smart constant volume airflow setpoints
- ◆ Snap-N-Go™ duct collars
- ◆ Lightweight EPP foam cabinet, 25 lbs.
- ◆ EC motors, variable speed with boost-mode, Dial-A-Flow easy balancing, or plug-in power
- ◆ MERV 13 filter accessory




SL SERIES

- ◆ 30–130 CFM
- ◆ Low-profile, commercial-grade appliance, often used for multi-family units
- ◆ EC motors, variable speed with boost-mode, Dial-A-Flow easy balancing, plug-in or hard wired power
- ◆ MERV 13 filter accessory



AWARD WINNING EV PREMIUM SERIES

- ◆ 30–390 CFM
- ◆ Certified for commercial-grade applications
- ◆ EC motors, variable speed with boost-mode, Dial-A-Flow easy balancing, plug-in or hard wired power, and MERV 13 filter accessory
- ◆ EV Premium+ with Touchscreen Control+ (TC1+) accessory is compliant with CEC Title 24, Part 6
- ◆ EV Premium SH, MH, LH awarded TechHome Builder's 2023 Brilliance Award




EV SERIES

- ◆ 40–200 CFM
- ◆ Four-duct design
- ◆ Plug-in cord power
- ◆ MERV 13 filter accessory

OPTIMIZE ENERGY EFFICIENCY IN EVERY SPACE

OPTIMIZING ENERGY EFFICIENCY

RenewAire ERVs are a sustainable ventilation solution. Our static-plate, cross-flow core separates the outgoing, polluted indoor airstream from the incoming fresh airstream—while simultaneously transferring total energy (heat and water vapor) between the two. Airstreams do not mix and pollutants are not transferred across partition plates.

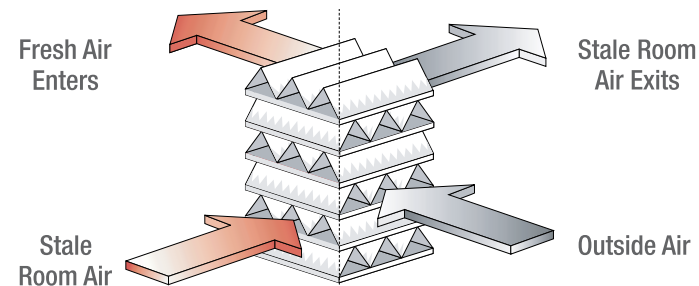

ASHRAE 90.1 ENERGY STANDARD

“Energy Standard for Buildings Except Low-Rise Residential Buildings” is a benchmark for commercial building energy codes in the U.S. and across the world. ERVs are required in several instances based on climate zone and percent of outdoor air at full design airflow rate.

RenewAire in Action: HVAC LOAD REDUCTION & HEALTHY IAQ AT GCU



- HVAC loads reduced by 40%
- Annual HVAC costs reduced by 40% every year for the life of the ERVs
- Integrating ERVs facilitated the downsizing of HVAC equipment
- Work within limiting parameters of existing HVAC infrastructure



RENEWAIRE ERVs REDUCE UNIVERSITY'S ANNUAL HVAC COST BY 40%: [BIT.LY/48RN6RP](http://bit.ly/48RN6RP)

RENEWAIRE CORE TECHNOLOGY

CERTIFICATION

- Commercial Units: Certified by the Air Conditioning, Heating and Refrigeration Institute (AHRI) for an industry-leading, low-to-zero Exhaust Air Transfer Ratio (EATR) at typical static pressure differential
- Residential Units: Certified by the Home Ventilating Institute (HVI) against standard CAN/CSA-C439-18 for an industry leading CFM/W and energy transfer effectiveness
- Superior core flammability performance; passes UL-723 and UL-1812

MAINTENANCE

- RenewAire cores are easy to clean without removing them from the unit, and they never require washing

INNOVATIVE CONSTRUCTION

- Core exchanger material is cellulosic-based and doesn't contain or use halogenated flame retardants or PVCs
- Manufactured with a galvanized steel frame

RELIABILITY

- An industry-leading 10-year structural and performance warranty for the static-plate core, two-year warranty for commercial products and five-year warranty for residential products

EXCEPTIONAL PERFORMANCE


- Moderates heat and humidity via total energy recovery to maintain a comfortable indoor environment
- No need for condensate pans
- Laminar airflow ensures that particulates do not accumulate in the core

REDUCED COSTS

- Optimized energy efficiency via core energy transfer decreases ventilation energy requirements, which can result in smaller air conditioning and heating needs


COMMERCIAL ERVs

The simplicity, flexibility, reliability, and efficiency of the RenewAire HE and LE Series Commercial ERVs excel in every commercial application. The packaged solutions of the HE Series and the large capacity of the LE Series offer a wide airflow range, as well as static capacities. These innovative commercial ERVs can be applied in every type of building in every climate to maximize energy efficiency, downsize HVAC equipment and reduce costs.



HE SERIES

- 120–8,800 CFM
- Packaged solutions
- Indoor/outdoor
- HE05 awarded Environmental Protection New Product of the Year 2025 Energy Efficiency/Renewable Energy Award



LE SERIES

- 1,250–11,000 CFM
- Large capacity
- Indoor/outdoor

APPLIED ERVs

The flexibility and efficiency of the RenewAire CA, PA, and SA Series Applied ERVs allow for numerous applications, airflows and configurations. The CA Series modular cabinets house up to four energy recovery cores and can be installed individually or be stacked up to five cabinets high. The PA Series modular arrays of 6, 8, 9, or 12 energy recovery cores can be installed side-by-side. The SA Series is designed for air-handling Original Equipment Manufacturers (OEMs) and caters to greater airflow needs.



CA SERIES

- 500–4,400 CFM
- Modular cabinets
- Indoor/outdoor
- Stackable to 20,000 CFM



PA SERIES

- 1,500–13,200 CFM
- Modular panels
- Indoor



SA SERIES


- 2,250–70,400 CFM
- Packaged core with plenum assembly
- Flexible and modular
- Large airflow capacities




Read our SA Series case study, HVAC Engineers and Contractors Solve Refrigeration Tonnage Constraints in Hospital Lab HVAC Retrofit: <http://bit.ly/3Y1zEkG>

RENEWAIRE ERVs TEMPER THE AIR

Our ERVs moderate the extremes of outdoor supply-air temperature and humidity year-round, providing a sustainable ventilation solution for every climate.

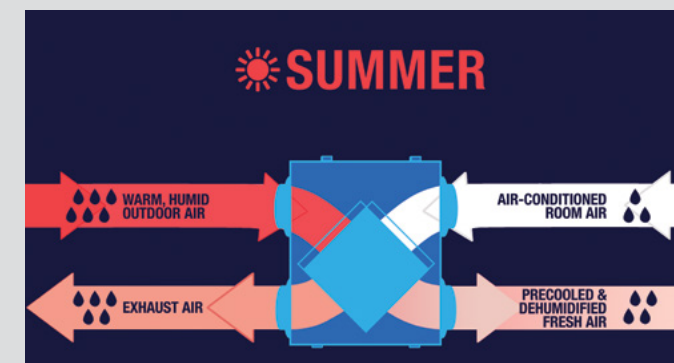

IN SUMMER, THE WARM, HUMID OUTSIDE AIR IS PRECOOLED AND DEHUMIDIFIED BY THE OUTGOING COOL INTERIOR AIR

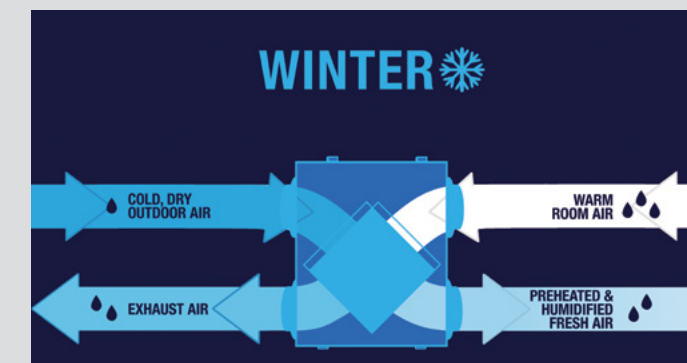

IN WINTER, THE COLD, DRY OUTSIDE AIR IS PREHEATED AND HUMIDIFIED BY THE OUTGOING WARM INTERIOR AIR

DOAS SYSTEMS

Specific codes within various regions call for DOAS-type products to deliver 100% outside air to each occupied space. Additionally, many codes call for incorporating energy recovery. ASHRAE standard 90.1 and IECC require a minimum of 50% of total effectiveness for the energy recovery component. Even when not mandated, it is one of the **best ways to improve a building's energy efficiency**.



HE+DX COIL INTEGRATED SYSTEM

- ◆ 166–1,100 CFM
- ◆ Commercial
- ◆ Indoor/outdoor
- ◆ HE+DX Coil; awarded Environmental Protection New Product of the Year 2025 Air Quality Solutions Award



DN SERIES

- ◆ 375–4,950 CFM
- ◆ Commercial
- ◆ Indoor/outdoor

OPTIONS AND ACCESSORIES



OPTIONS

- ◆ Integrated Programmable Controls
- ◆ EC Motorized Impellers
- ◆ Variable frequency drives
- ◆ Motorized isolation dampers
- ◆ Bypass economizers



ACCESSORIES

- ◆ Electric duct heaters
- ◆ Indirect gas-fired duct furnaces
- ◆ Combo curbs
- ◆ BACnet Fan Control

VIEW LIFE SIZE VERSIONS OF SELECT ERVs



EV PREMIUM X



HE071N



HE10RT



LE10RT

GREEN BUILDING TRENDS

High-performance, green-building standards seek to reduce energy use and increase ventilation to improve health, wellness, IAQ, and indoor environmental quality (IEQ). Sustainable design initiatives like ASHRAE Standard 189.1, LEED, 2030 Challenge, Living Building Challenge and WELL Building Standard have grown in popularity among architects, engineers, contractors, and building owners alike.

RenewAire ventilation technologies create healthier and more comfortable indoor environments, while optimizing energy efficiency. This is done by reusing otherwise-wasted total energy from the exhaust air to condition incoming outdoor air. The results are exceptional IAQ, IEQ, energy reductions and cost savings.



RENEWAIRE ERVs ARE THE SUSTAINABLE VENTILATION SOLUTION


WHY ENERGY RECOVERY IS CRITICAL

DECARBONIZATION AND ENERGY EFFICIENCY DEMANDS

The **main responsibility of a 100% outdoor air unit is to dehumidify** the incoming air. In this process, the system inherently handles large heating and cooling loads. Adding energy recovery significantly minimizes these loads and the HVAC equipment required to condition the air.

ASHRAE 90.1-2010 requires the use of energy recovery based upon a unit's supply airflow, outdoor air percentage, geographic location and hours of operation. The standard mandates the total effectiveness (sensible and latent) by a minimum of 50% when required.

The effectiveness of energy recovery devices varies depending on the type, material and airflow balance. This value is determined based on the test procedure outlined in the Air Conditioning, Heating and Refrigeration Institute's (AHRI) Standard 1060.

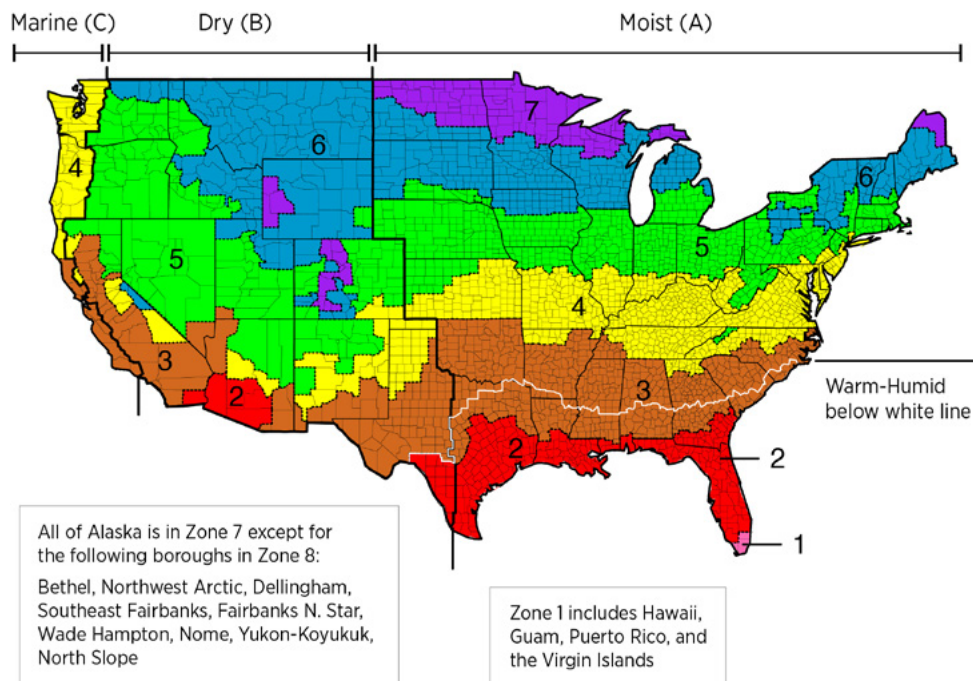

Map courtesy of International Code Council

PERCENTAGE OF OUTDOOR AIR AT FULL DESIGN AIRFLOW RATE (CFM)

ZONE	30% ≤ 40%	40% ≤ 50%	50% ≤ 60%	60% ≤ 70%	70% ≤ 80%	80% ≥
	Design Supply Fan Airflow Rate (CFM)					
3B, 3C, 4B, 4C, 5B	NR	NR	NR	NR	≥ 5,000	≥ 5,000
1B, 2B, 5C	NR	NR	≥ 26,000	≥ 12,000	≥ 5,000	≥ 4,000
6B	≥ 11,000	≥ 5,500	≥ 4,500	≥ 3,500	≥ 2,500	≥ 1,500
1A, 2A, 3A, 4A, 5A, 6A	≥ 5,500	≥ 4,500	≥ 3,500	≥ 2,000	≥ 1,000	≥ 0
7, 8	≥ 2,500	≥ 1,000	≥ 0	≥ 0	≥ 0	≥ 0



RENEWAIRE VENTILATION SOLUTIONS INCREASE MONETARY BENEFITS



RENEWAIRE SUPPORTS THE PILLARS OF SUSTAINABILITY



PEOPLE

Reduce acute and chronic health problems

Improve alertness and cognitive function

Boost productivity



PLANET

Committed to green manufacturing since 1982

Protect the environment with less energy use

Achieve a green structure with greater energy efficiency



PROFIT

Can benefit from a short payback period

Realize annual energy savings

Trouble-free operations and maintenance

For unit details and certifications, visit: RenewAire.com/products