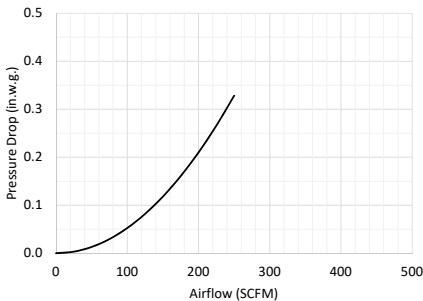
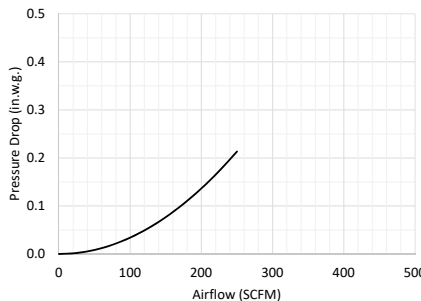
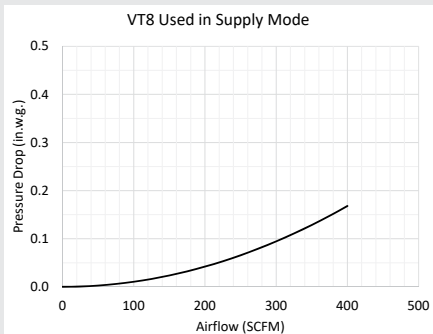
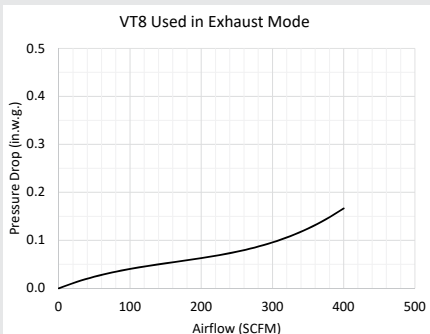
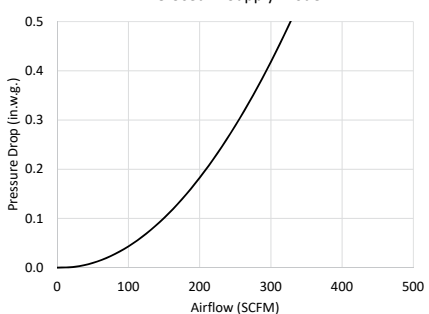
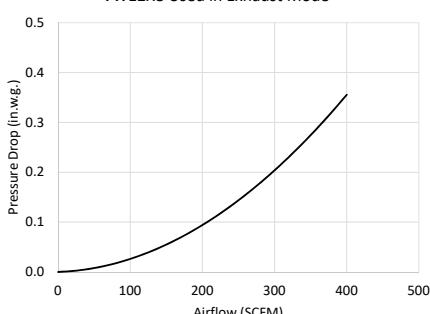

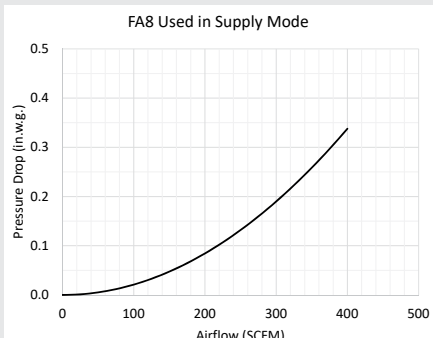
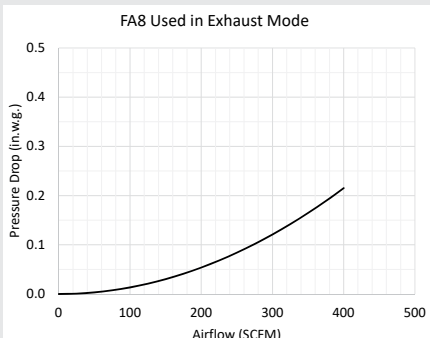
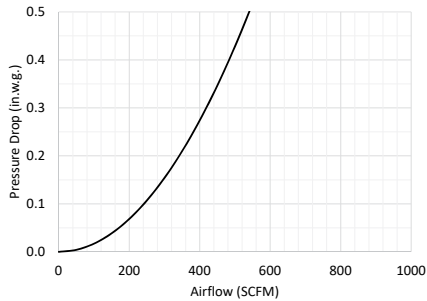
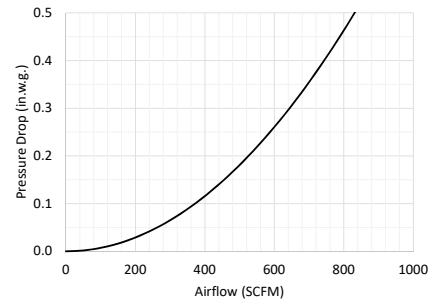
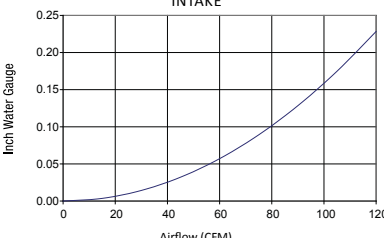


RenewAire Hoods and Dampers

6" Vinyl Louvered Wall Vents (VB106 & VW106) 	Single Pack: VB106: P/N 102405, VW106: P/N 102404 6 Pack: VW106-6: P/N 102469, VB106-6: P/N 102470	♦ Brown (VB) or white (VW) ♦ Low pressure drop design ♦ Cleanable metal screen	VW/VB106 Used in Supply Mode 	VW/VB106 Used in Exhaust Mode 																				
8" Vinyl Louvered Wall Vents (VT8) 	P/N 1023990	♦ Taupe ♦ 1 1/2" channel for siding ♦ 4 removeable flaps ♦ 1/4" plastic screen	VT8 Used in Supply Mode 	VT8 Used in Exhaust Mode 																				
12" x 8" Galvanized Louvered Wall Vents (VW12 x 8) 	P/N 102412	♦ Round duct connect ♦ Flush mount ♦ 1/2" metal screen	VW12X8 Used in Supply Mode 	VW12X8 Used in Exhaust Mode 																				
8" Galvanized Hooded Wall Vents (FA8-G) & W8" Galvanneal Hooded Wall Vents (FA8-P) 	FA8-G: P/N 102406, FA8-P: P/N 102409	♦ Paintable (galvanneal only) ♦ 1/4" metal screen	FA8 Used in Supply Mode 	FA8 Used in Exhaust Mode 																				
6" & 8" Backdraft Dampers (BD6, BD8) 	BD6: P/N 102400, BD8: P/N102401	♦ Mechanical “butterfly” design ♦ Male/female ends	BD6 	BD8 																				
6" & 8" Motorized Dampers (MD6-FM, MD6-PT, MD6, MD8) 	MD6-FM: P/N 145000, MD6-PT: P/N 145010, MD6: P/N 145020, MD8: P/N 145030	♦ 24VAC powered to open ♦ Prevent unwanted airflow through ERV when adverse outdoor air conditions, such as wildfire smoke are present or to meet local codes ♦ Range of kits to accommodate different installations. Use the table to identify the correct kit for installation	<table><tr><th>Damper Kit</th><th>MD6-FM</th><th>MD6-PT</th><th>MD6</th><th>MD8</th></tr><tr><td>Diameter</td><td colspan="3">6"</td><td>8"</td></tr><tr><td>ERV has a "DAMP" terminal</td><td colspan="2">No</td><td colspan="2">Yes</td></tr><tr><td>Furnace interlock required</td><td>Yes</td><td colspan="3">No*</td></tr></table> *Furnace interlock may still be used, but must be purchased separately.		Damper Kit	MD6-FM	MD6-PT	MD6	MD8	Diameter	6"			8"	ERV has a "DAMP" terminal	No		Yes		Furnace interlock required	Yes	No*		
Damper Kit	MD6-FM	MD6-PT	MD6	MD8																				
Diameter	6"			8"																				
ERV has a "DAMP" terminal	No		Yes																					
Furnace interlock required	Yes	No*																						
Concentric Vent (CV6-110) 	P/N141178	♦ Max airflow 110 CFM ♦ Simplifies installation with only one 6" diameter hole through exterior walls ♦ Fits both 5" or 6" diameter insulated flexible ducts	INTAKE 	EXHAUST 